


<b>PUMP RANGE</b>	<b>E</b>
<b>MODEL</b>	<b>044</b>
<b>STATUS</b>	<b>CURRENT</b>



<b>SECTION</b>	<b>2</b>
<b>PAGE</b>	<b>04401</b>
<b>DATE</b>	<b>May 2007</b>

**PERFORMANCE DATA**

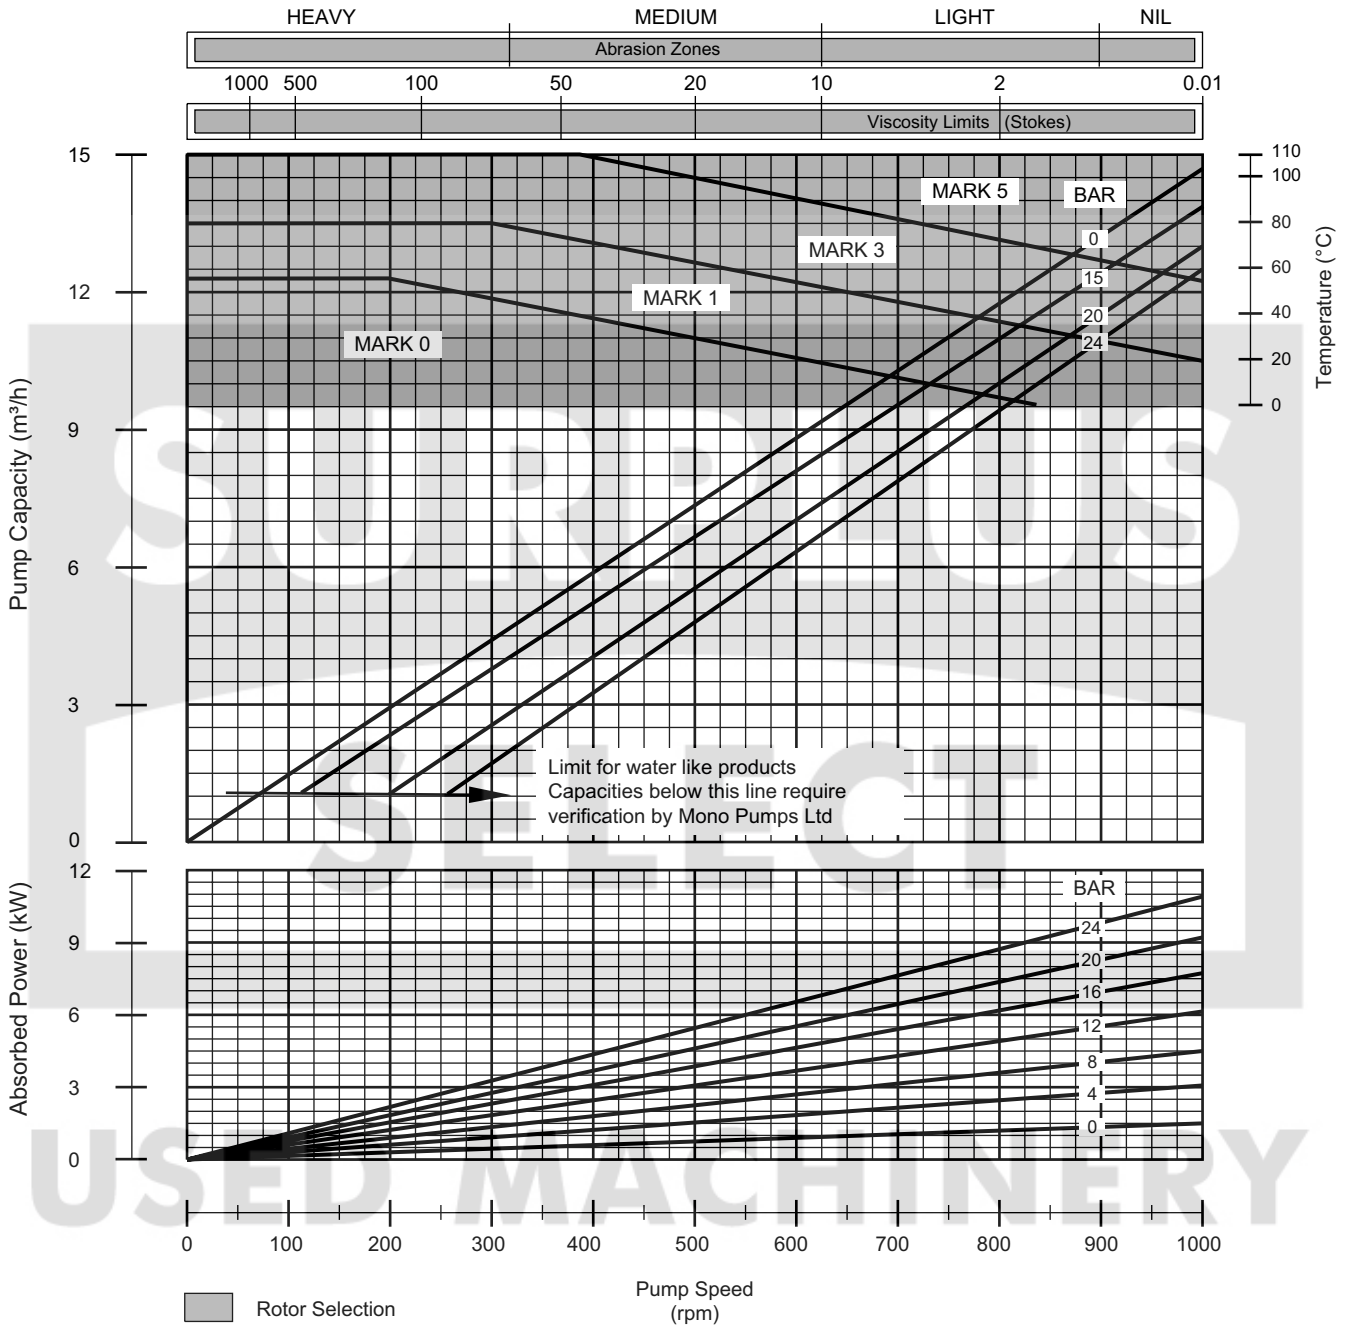

<b>SLIP CORRECTION</b>	$n = \text{corrected duty speed, } n_0 = \text{rpm @ 0 bar, } n_p = \text{rpm @ duty press.}$ $n_s = \text{Slip Speed} = n_p - n_0, f \times n_s = \text{Slip Speed Correction} = f.n_s$ <b>Slip Corrected Speed (<math>n = n_p - f.n_s</math>)</b>					
<b>TEST PARAMETERS</b>	Above data represents tests on water @ 20°C using RR and RA stator materials.					
<b>FOOD APPLICATIONS</b>	Check customer CIP process if available. Refer to Section 1 for CIP suitability					
	<b>SOLIDS HANDLING (mm)</b>		<b>STARTING TORQUE (Nm)</b>			
	Hard Angular	Soft and compressible	Mark 0	Mark 1	Mark 3	Mark 5
<b>E</b>	8	30	150	100	100	100

